

### Flowshield SK 1000 (1mm)



#### Description

Flowshield SK 1000 is a solvent free, epoxy self-smoothing flooring system applied at 1mm thickness with excellent resistance to Skydrol® and hydraulic fluids.

#### Uses

Typical uses are aircraft hangers, aircraft parking areas and workshops.

#### Benefits

- Resistant to contaminants in hangars such as Skydrol®, jet fuel & engine oil
- Excellent chemical resistance
- Seamless finish
- Hygienic and easy to clean
- Attractive; high gloss finish
- High abrasion resistance
- Solvent free; low odour

#### Project References

Available on request.

#### Standard Colour Chart



Ivory



Yellow



Dark Red



Light Blue



Blue



Dark Green



Light Grey



Mid Grey




Dark Grey



Black

#### System Design

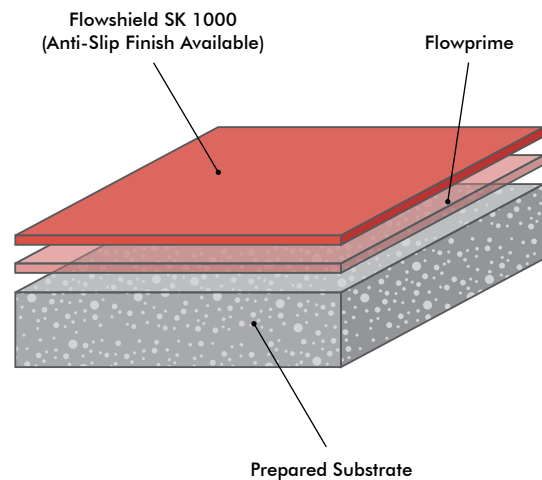

## Model Specification

Product: Flowshield SK 1000

Finish: Gloss

Thickness: 1mm

Colour: \_\_\_\_\_

Preparatory work and application in accordance with suppliers instructions.

Manufacturer: Flowcrete Middle East FZCO

Telephone : Customer Service +971 4 886 4728

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry up to 75% RH as per BS8204 and free from rising damp and ground water pressure.

## Products Included in this System

Flowprime

Flowshield SK 1000

For slip resistant dressings, please consult our Technical Advisors.

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our website at [www.flowcrete.ae](http://www.flowcrete.ae)

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Middle East FZCO is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Fire Resistance	BS476:Part 7 Surface spread of flame: Class 2 (indicative)
Slip Resistance Value (SRV)	TRRL Pendulum Test Dry 67
Thermal Resistance	Tolerant up to 60°C
Water Permeability	Nil – Karsten test (impermeable)
Vapour Permeability	4 gms /m <sup>2</sup> /mm /24 hours
Surface Hardness	180 secs. Koeig Hardness Test
Chemical Resistance	Contact Technical Department
Abrasion Resistance	Taber Abrader: 90 mg loss per 1000 cycles (1 kg load using CS17 wheels)
Compressive Strength	>60 N/mm <sup>2</sup> (BS6319)
Flexural Strength	>40 N/mm <sup>2</sup> (BS6319)
Tensile Strength	>25 N/mm <sup>2</sup> (BS6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.
Toxicity	Taint free to sensitive foodstuffs.

## Speed of Cure

	10°C	20°C	30°C
Light Traffic	48 hrs	24 hrs	16 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	12 days	7 days	6 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.