

## Isocrete Self Level Plus (2-4mm)



### Description

A fast drying hand and pump applied cement-based underlayment, for easy levelling of concrete floors before the installation of thin floor coverings (e.g. vinyl and carpets).


### Uses

Suitable for floors in office buildings, shops, public buildings, schools, hospitals, airports, prisons, hotels and resorts, casinos.

Isocrete Self Level Plus provides good resistance to impact, point loading and abrasion - making it suitable as a temporary work surface for following trades prior to vinyl being applied.

For a screed to receive an epoxy resin finish in areas taking light traffic, use Isocrete 1500. For a flowing screed for industrial use, use Flowscreed Industrial Top.

### System Design

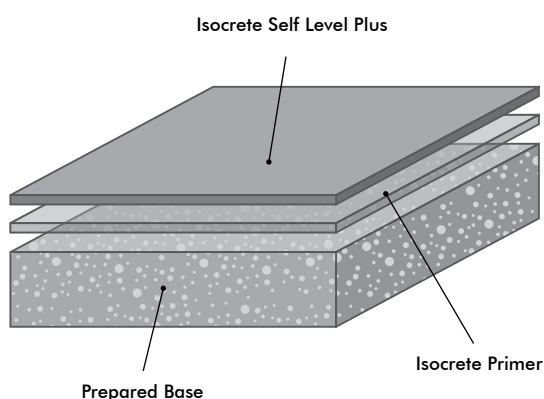

### Benefits

- Self levelling
- Fast track installation - 2000m<sup>2</sup> per day for 2mm thickness, under suitable conditions
- Fast setting - walk on after 2 - 4 hours under suitable conditions
- Fast drying - install moisture sensitive finishes after 24 hours dependent on thickness, ambient temperatures and humidity
- Single pack
- Protein free - will not harbour bacteria

### Project References

Available on request.

## Model Specification

Product: Isocrete Self Level Plus  
Thickness: 2-4mm  
Preparatory work and application in accordance with suppliers instructions.  
Manufacturer: Flowcrete Middle East FZCO  
Telephone : Customer Service +971 4 886 4728

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry up to 75% RH as per BS8204 and free from rising damp and ground water pressure. If above 75% RH Hydraseal DPM can be incorporated directly beneath the Isocrete Self Level Plus system, enabling the immediate installation of floor finishes once the screed has dried.

## Products Included in this System

Isocrete Primer  
Hydraseal DPM (if required)  
Natural Quartz  
Isocrete Self Level Plus

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our website at [www.flowcrete.ae](http://www.flowcrete.ae)

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Middle East FZCO is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Fire Resistance	BS 476-7: Spread of Flame Class 1
Impact Resistance	BS 8204-1 Cat: A
Thermal Resistance	50°C Max
Compressive Strength (28 days)	24 N/mm <sup>2</sup> (BS EN 196)
Flexural Strength (28 days)	6 N/mm <sup>2</sup> (BS EN 196)
Adhesion to C30 Concrete (28 days)	> 1 N/mm <sup>2</sup>
Shrinkage	< 0.06%
Maximum Particle Size	0.5mm
Protein Content	Nil
Thickness	2 - 4mm
Laying Temperature	5 - 35°C
Flow Ring (65mm diam x 40mm high)	230 - 250mm
Mix Ratio per 25kg	5.7 litres water

## Speed of Cure (per layer)

	10°C	20°C
Walk on	4 - 8 hrs	2 - 4 hrs
Light Foot Traffic	2 days	2 days

## Drying Time

Moisture sensitive floor finishes can be installed when the screed is dry to 75% RH as per BS8203, typically after 24 hours, dependent on thickness and ambient conditions (20°C, 50% RH). After 6 hours curing without draughts ensure the area has sufficient ventilation to allow the screed to dry.

## Protection on Completion

Ensure the screed is not subject to draughts during the first 6 hours of curing as this may lead to cracking and crazing. Tape up doorways with polythene to prevent air movement. Prevent contamination by following trades e.g. plastering, including water spillage.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.