

### Flowfast Quartz



#### Description

Flowfast Quartz is a hard-wearing, decorative, fast curing, methyl methacrylate (MMA) resin floor topping made up of colour stable quartz granules encapsulated in a clear resin binder.

Flowfast Quartz has been developed to enable very fast track applications, therefore dramatically reducing down time.

#### Uses

Ideal for use in production areas, kitchens, freezer, coldrooms, wet and dry process areas where the floor is subjected to heavy traffic, impact and chemical spills; areas where time for floor repairing and resurfacing is limited.

#### Benefits

- Fast curing and rapid installation
- Can be overlaid onto existing ceramic tiles, marble, granite, terrazzo or timber floors
- Can be applied at (-40°C)
- Decorative floor finish
- High scratch resistance
- High abrasion resistance
- Excellent wear and impact resistance
- Good slip resistance
- High chemical resistance
- Seamless and hygienic finish
- Easy to clean and maintain

#### Project References

Available on request.

#### Standard Colour Chart - Mixed Colours



Cream 7700




Green 7300



Yellow 7400




Red 7500



Blue 7750



Grey 7120



Grey 7600




Grey 7770

#### Standard Colour Chart - Single Colours



White



Light Grey



Earth Brown




Yellow



Red

#### System Design

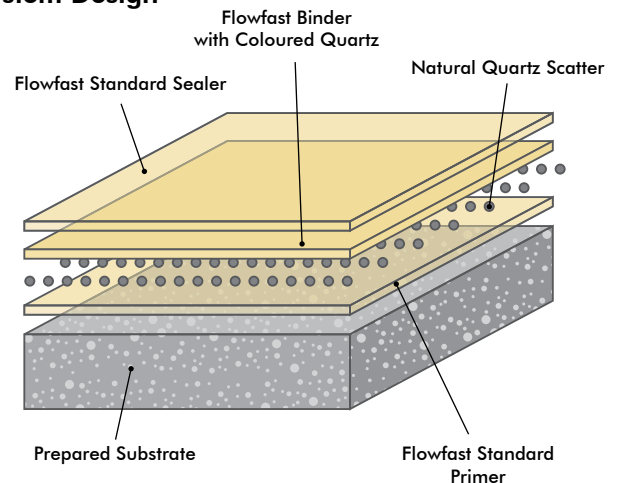

## Model Specification

Product: Flowfast Quartz System  
Finish: Satin  
Thickness: Dependant on specification  
Colour: \_\_\_\_\_  
Preparatory work and application in accordance with suppliers instructions.  
Manufacturer: Flowcrete Middle East FZCO  
Telephone : Customer Service +971 4 886 4728

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry up to 95% RH as per BS8204 and free from rising damp and ground water pressure. A special Flowfast primer can be used for substrates up to 100% RH (surface dry).

## Products Included in this System

Flowfast Standard Primer  
Coloured Quartz  
Flowfast Standard Binder mixed with Coloured Quartz  
Flowfast Standard Sealer

Consult individual Product Data sheets for information on Flowfast Catalyst levels.

Slip resistant profile can be tailored in the system design to meet client requirements.

For application at sub zero temperatures, please contact Flowcrete Middle East for specific Method Statements.

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our website at [www.flowcrete.ae](http://www.flowcrete.ae)

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Middle East FZCO is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Slip Resistance	TRRL Pendulum Slip Test Dry >40 Wet depends on specification
Impact Resistance	ISO6272 1kg weight >1.8 m 2kg weight >1.5 m
Abrasion Resistance	BS 8204-2 Class AR1 -Heavy duty industrial and commercial
Temperature Resistance	Tolerant of sustained temperatures up to 70°C
Water Permeability	Nil – Karsten test (impermeable)
Chemical Resistance	Contact Technical Department
Compressive Strength	60 N/mm <sup>2</sup> (BS6319)
Flexural Strength	20 N/mm <sup>2</sup> (BS6319)
Tensile Strength	15 N/mm <sup>2</sup> (BS6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.

## Speed of Cure (per coat)

Full traffic	2 Hours
Full chemical cure	2 Hours

Cure at ambient temperatures in the range 0°C to +30°C can be achieved by altering the quantity of catalyst used. For applications below 0°C, please consult our Technical Department.

## Aftercare - Cleaning and Maintenance

Clean floors regularly using a rotary scrubber in conjunction with a mildly alkaline detergent (without solvent).

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.