



EXPRESSIONS

- ▶ Contemporary artistic finishes that make a style statement in commercial facilities.

Artistic Floor Finishes

Flowcrete's Expressions flooring range offers large-scale commercial and retail clients a unique, one-of-a-kind floor finish that has been designed for high-traffic, high-performance spaces looking to impress underfoot.

The Expressions range evokes cosmopolitan sophistication and artistic expression to create floors that are consistently inconsistent but which artfully interplay a raw industrial aesthetic with a soft and welcoming feel.

The resin systems, based on polyurethane and polyurea technology, are available in a variety of subtle colour ways and with a choice of decorative effects to create a real talking point at ground-level.

Bring an artistic aesthetic into your commercial setting and express your brand personality with Flowcrete's Expressions range.

Expressing Brand Personality in Commercial Environments

Combining the highest artistic design finish with the highest performance properties, the Expressions range is the ideal flooring solution for commercial brands...



Retail Stores & Boutiques



Leisure Facilities



Restaurants & Bars






Performance Benefits

✓	Seamless hygienic finish
✓	Exceptional wear resistance
✓	Easy to clean and maintain
✓	Chemical resistant
✓	Low shrinkage
✓	Durable underfoot
✓	Slip resistant

Application Suitability

Retail	✓
Restaurants	✓
Bars	✓
Education	✓
Leisure	✓
Hotels	✓
Resorts	✓
Offices	✓

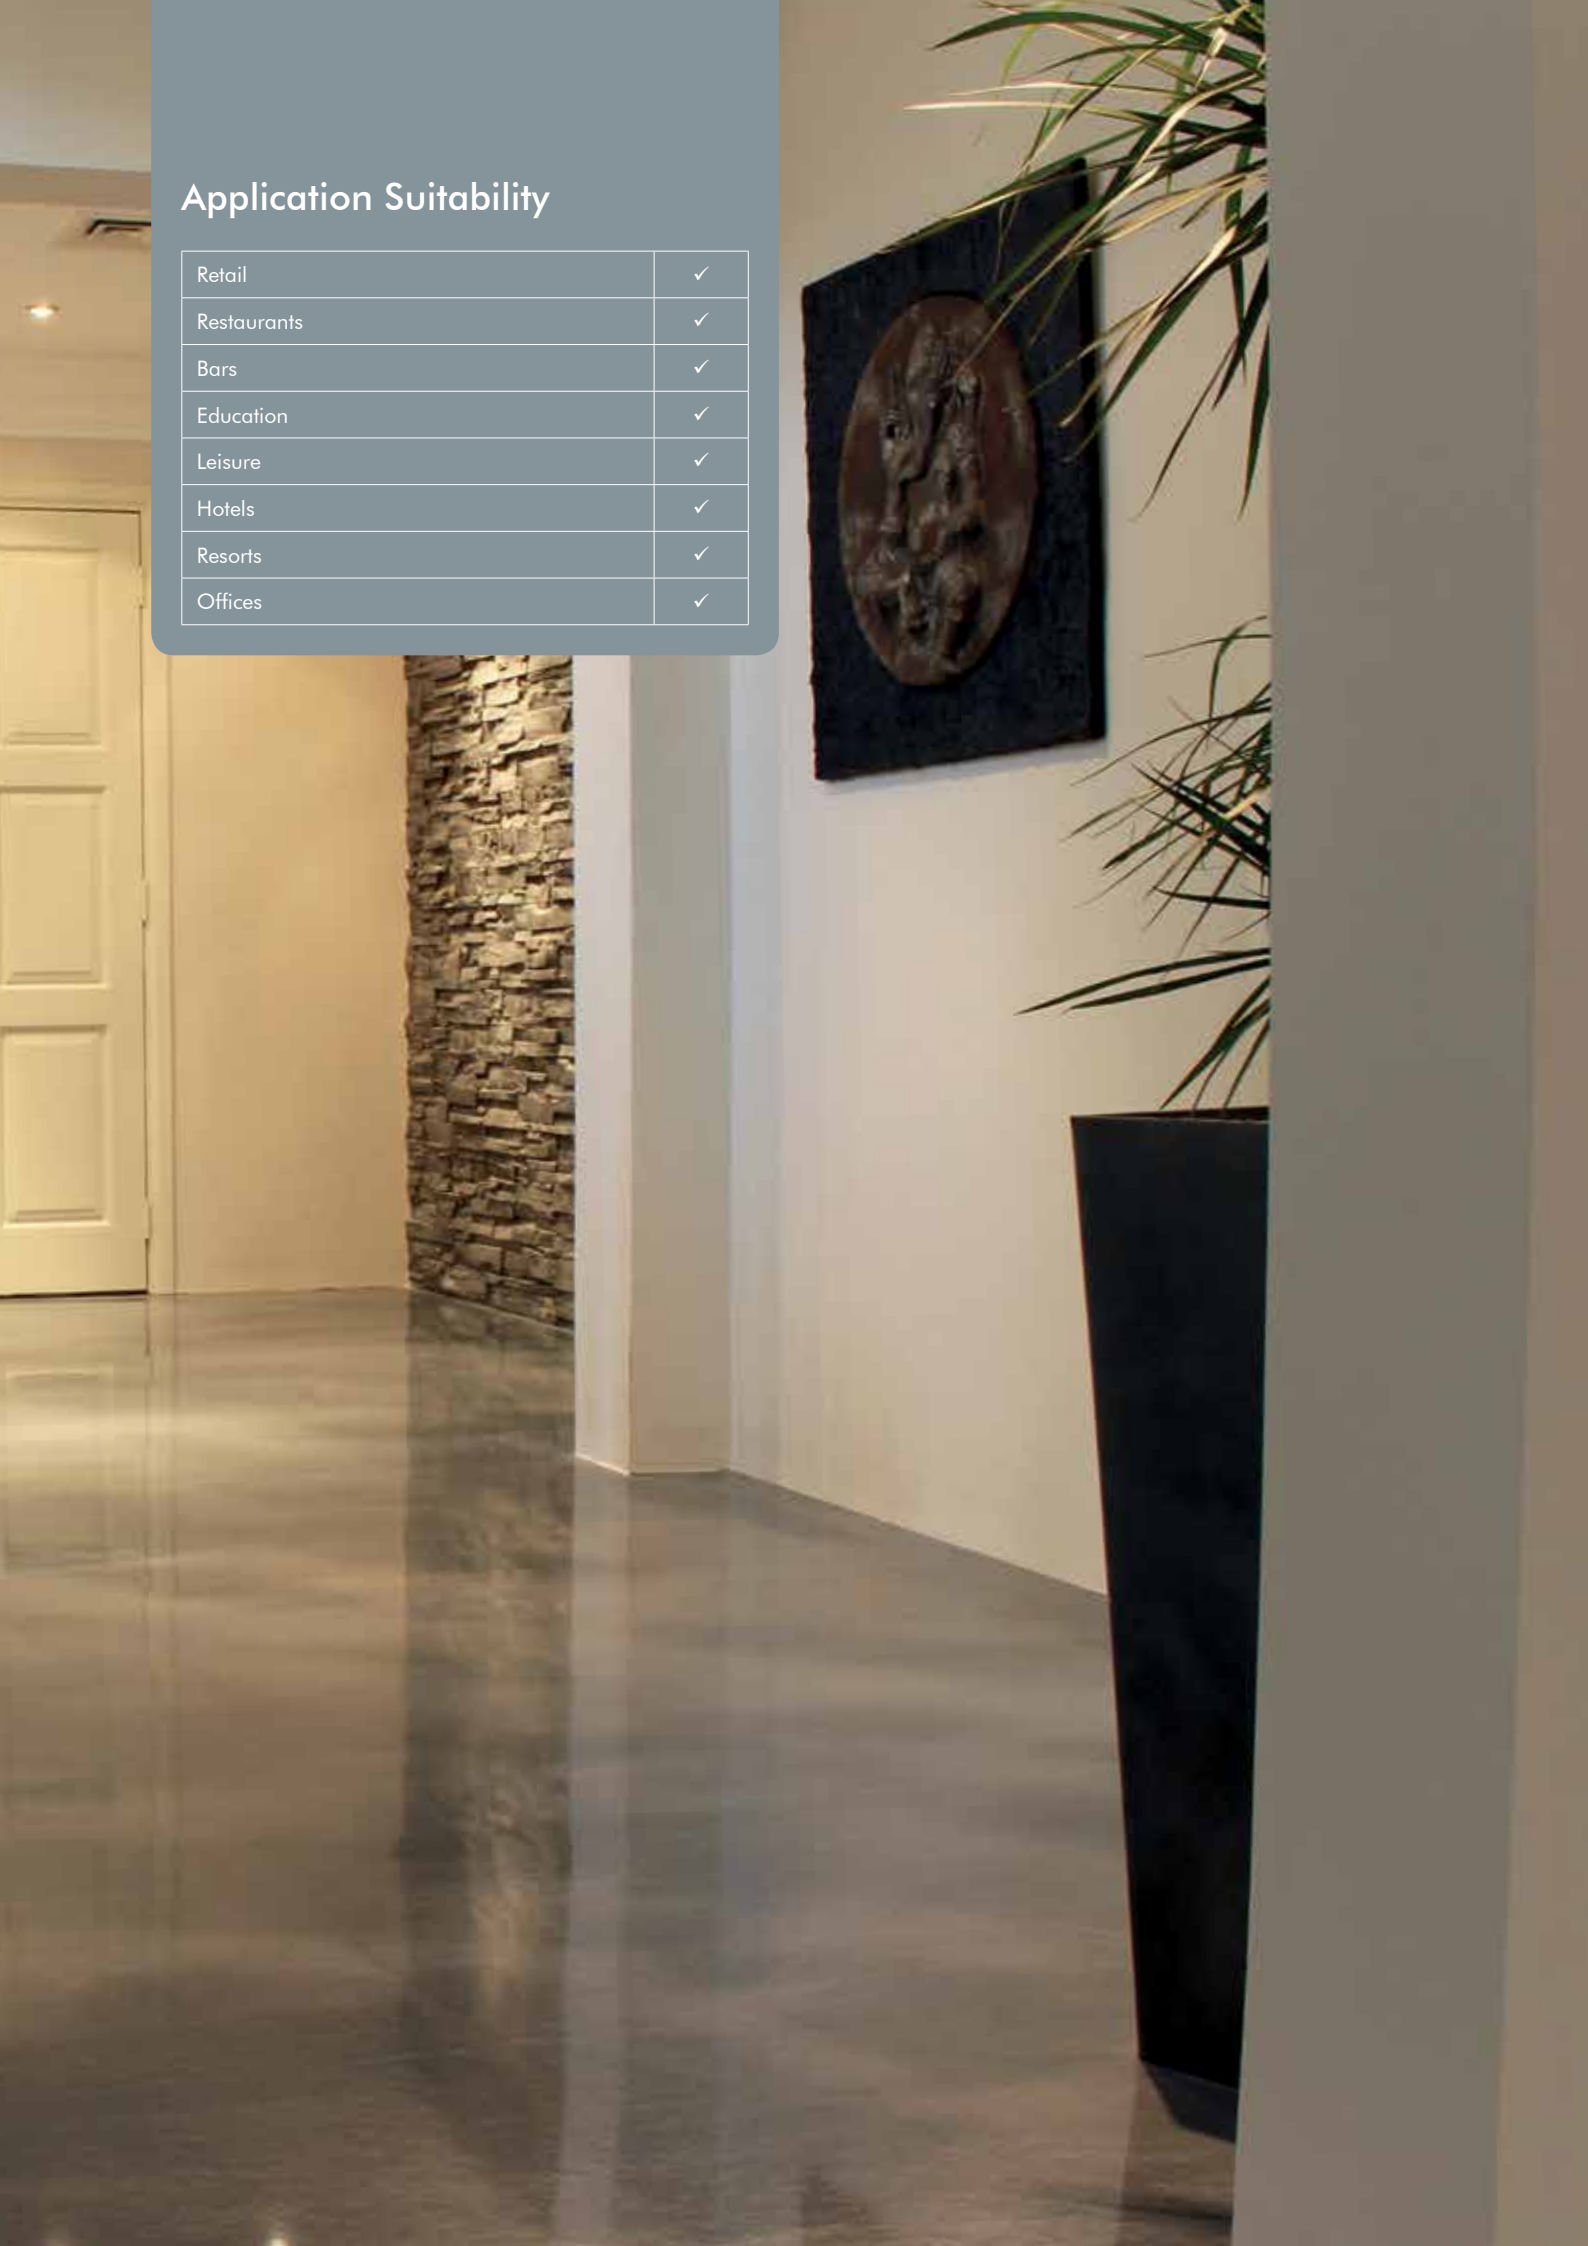

Metallic Expressions

A highly decorative, hard-wearing advanced polyurea floor finish with a unique deep burnished finish.

Developed as a contemporary solution for a range of commercial applications, the system has highly versatile design potential whilst offering superior performance benefits.



Attractive:

Decorative metallic finish to transform dull commercial environments.



Bright Colour Palette:

Available in a range of attractive swatches for a vibrant finish.



Unique Application:

Versatile design potential achieved using specialist installation techniques.



Durable:

Exceptional wear resistance for a hard-wearing finish underfoot.



UV Resistant:

Resistant against colour damage from exposure to sunlight.

Colours



Grey Goose



Blue Lagoon



Sangria



Merlot



Latte



Cosmo



Coffee



Mojito

Technical Profile

APPLICATION SUITABILITY

✓ New Build ✓ Refurbishment

SLIP RESISTANCE

TRRL Pendulum Slip Test Dry >40, Wet depends on specification

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 70°C

FIRE RESISTANCE

BS 476-7 Surface spread of flame Class 1

ABRASION RESISTANCE

Taber Abrader 50mg loss per 1000 cycles (1kg load using CS17 wheels)


WATER PERMEABILITY

Karsten Test Nil (Impermeable)

BOND STRENGTH

> 1.5 MPa*

SPEED OF CURE	20°C	35°C
Light Traffic	19 hrs	15 hrs
Full Traffic	24 hrs	20 hrs
Full Chemical Cure	7 days	6 days

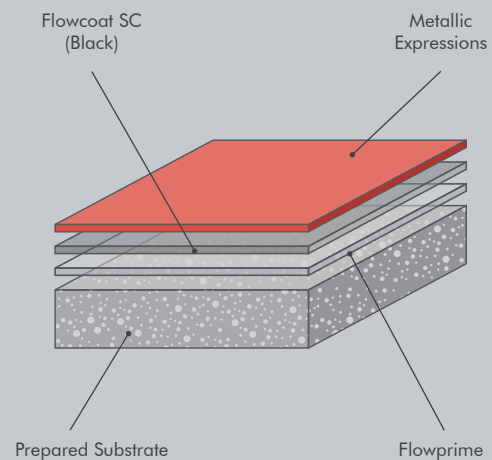

*Assumes concrete compressive strength is greater than 25 N/mm²

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

Urban Expressions

(Dual Tone)

A smooth, understated polyurethane floor finish with a unique, artistic, multi-dimensional finish.

The decorative material, which provides clients with a completely seam-free finish that is easy to clean and maintain, is suitable for a range of high-end commercial environments.



Artistic:

Natural multi-dimensional finish to transform dull environments.



Unique Application:

Versatile design potential achieved using specialist installation techniques.



Resistant:

Excellent resistance to chemicals, as well as slips and trips.



Durable:

Exceptional wear resistance for a hard-wearing finish underfoot.




Hygienic:

Seamless application that delivers a hygienic, easy-to-clean finish.

Colours



Smokey Grey



Dusty Grey



Morning Coffee



Old Gold



Midnight Green



Slate Grey

Technical Profile

APPLICATION SUITABILITY

- ✓ New Build
- ✓ Refurbishment

SLIP RESISTANCE

TRRL Pendulum Slip Test	Dry >40, Wet depends on specification
-------------------------	---------------------------------------

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 60°C

FIRE RESISTANCE

BS 476-7 Surface spread of flame	Class 2
-------------------------------------	---------

ABRASION RESISTANCE

Taber Abrader	80mg loss per 1000 cycles (1kg load using CS17 wheels)
---------------	---


WATER PERMEABILITY

Karsten Test	Nil (Impermeable)
--------------	-------------------

BOND STRENGTH

> 1.5 MPa*

SPEED OF CURE	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	12 hrs
Full Traffic	72 hrs	48 hrs	24 hrs
Full Chemical Cure	12 days	7 days	6 days

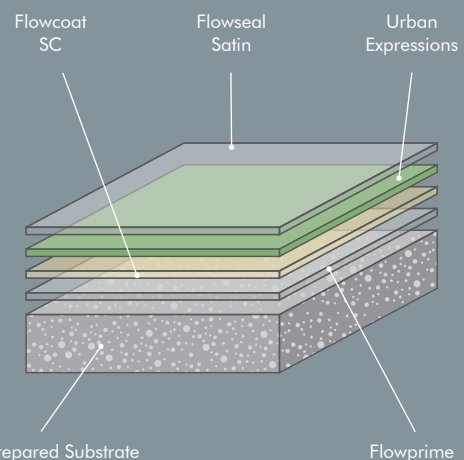

*Assumes concrete compressive strength is greater than 25 N/mm²

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.




Application Suitability

Retail	✓
Restaurants	✓
Bars	✓
Education	✓
Leisure	✓
Hotels	✓
Resorts	✓
Offices	✓

Application Suitability

Retail	✓
Restaurants	✓
Bars	✓
Education	✓
Leisure	✓
Hotels	✓
Resorts	✓
Offices	✓

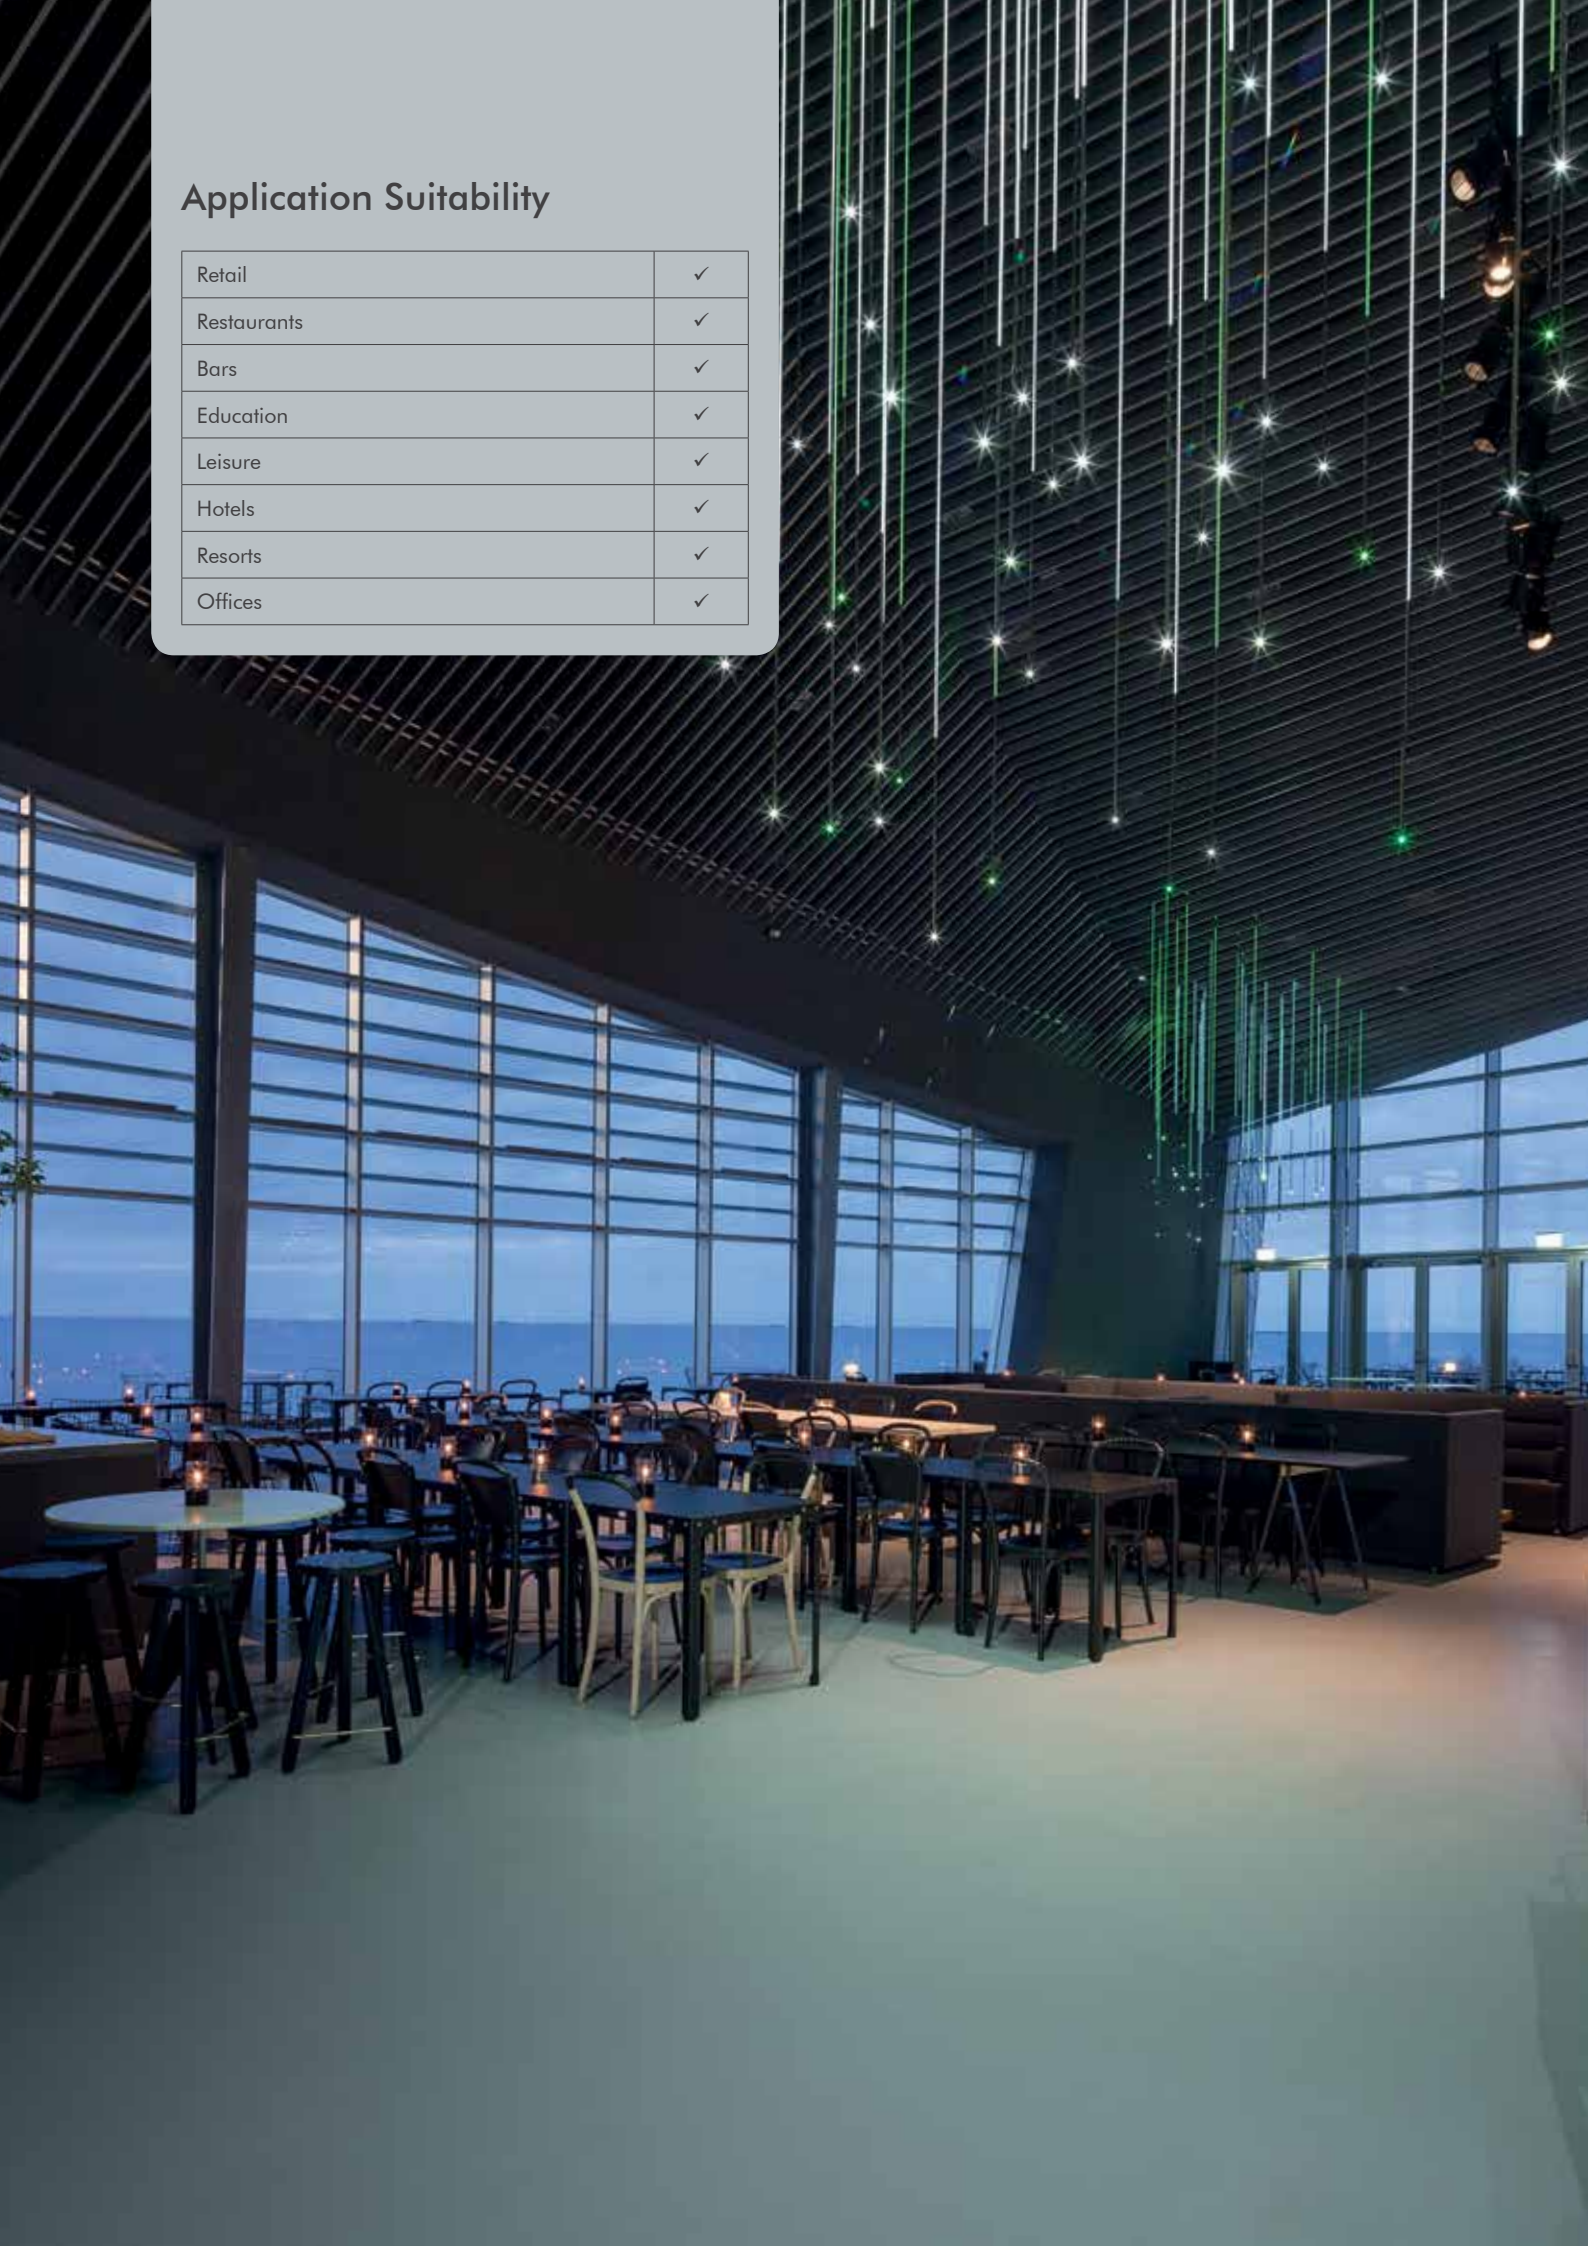

Urban Expressions

(Single Tone)

A smooth, minimalistic polyurethane floor finish with a contemporary, multi-dimensional finish.

The artistic finish is suitable for high-end commercial environments such as fashion boutiques, restaurants, bars and other leisure settings looking for a wow-factor underfoot.



Artistic:

Natural multi-dimensional finish to transform dull environments.



Unique Application:

Versatile design potential achieved using specialist installation techniques.



Resistant:

Excellent resistance to chemicals, as well as slips and trips.



Durable:

Exceptional wear resistance for a hard-wearing finish underfoot.



Hygienic:

Seamless application that delivers a hygienic, easy-to-clean finish.

Colours



Smokey Grey




Dusty Grey



Morning Coffee



Old Gold



Midnight Green



Slate Grey

Technical Profile

APPLICATION SUITABILITY

✓ New Build

✓ Refurbishment

SLIP RESISTANCE

TRRL Pendulum Slip Test

Dry >40, Wet depends on specification

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 60°C

FIRE RESISTANCE

BS 476-7
Surface spread of flame

Class 2

ABRASION RESISTANCE

Taber Abrader

80mg loss per 1000 cycles
(1kg load using CS17 wheels)

WATER PERMEABILITY


Karsten Test

Nil (Impermeable)

BOND STRENGTH


> 1.5 MPa*

SPEED OF CURE	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	12 hrs
Full Traffic	72 hrs	48 hrs	24 hrs
Full Chemical Cure	12 days	7 days	6 days

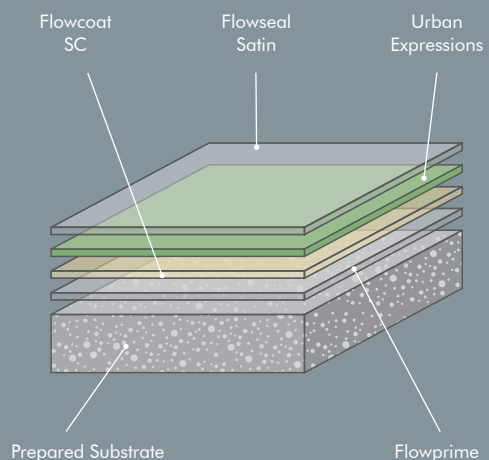

*Assumes concrete compressive strength is greater than 25 N/mm²

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

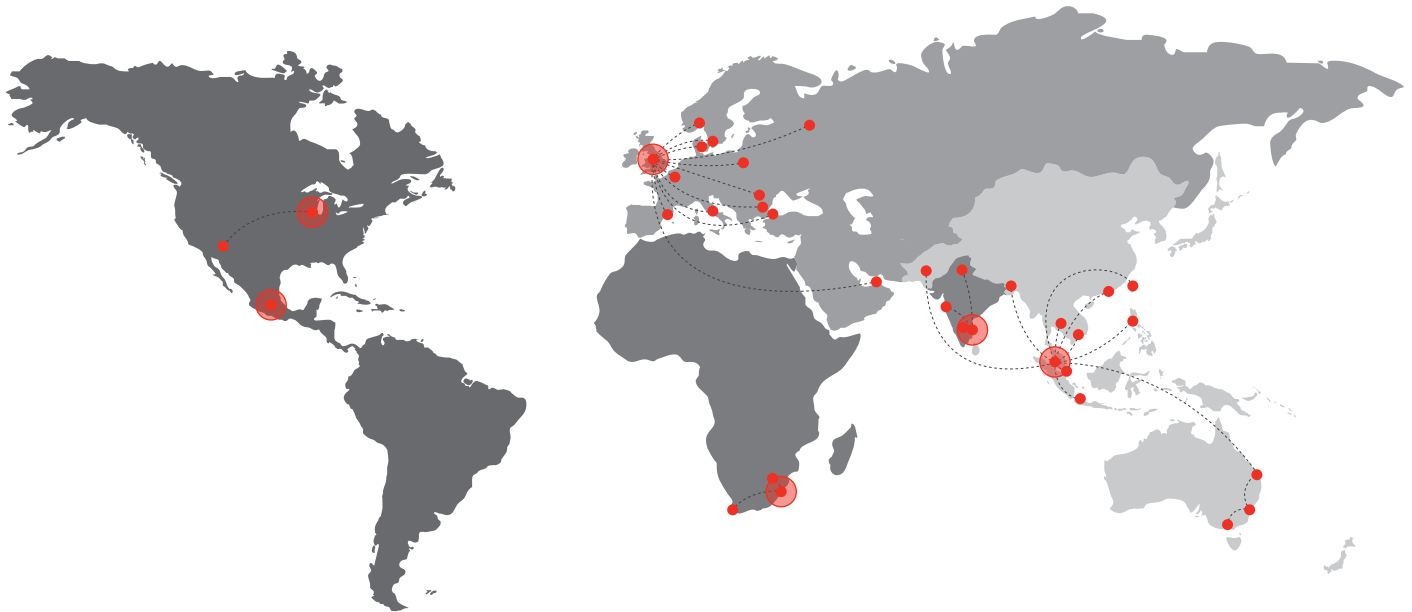

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Africa

South Africa +27 31 701 0017 southafrica@flowcrete.com

Asia Pacific (APAC)

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+88 02 985 7222	bangladesh@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Malaysia	+60 3 6277 9575	asia@flowcrete.com
Pakistan	+60 3 6277 9575	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+60 3 6277 9575	singapore@flowcrete.com
Taiwan	+60 3 6277 9575	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Europe & Middle East (EME)

Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 3513	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 2946570	turkey@flowcrete.com
UAE	+971 4 347 0460	uae@flowcrete.com
UK	+44 (0) 1270 753 000	uk@flowcrete.com

India

India +91 44 40176600 india@flowcrete.com

North America

Mexico	+55 44 40 94 00	mexico@flowcrete.com
USA	+1 513-943-4225	americas@flowcrete.com